

TEAKO

Decoration Laminate Series

Parquet Life Style



LAMINATE PARQUET






TEAKO





Decoration Laminate Series





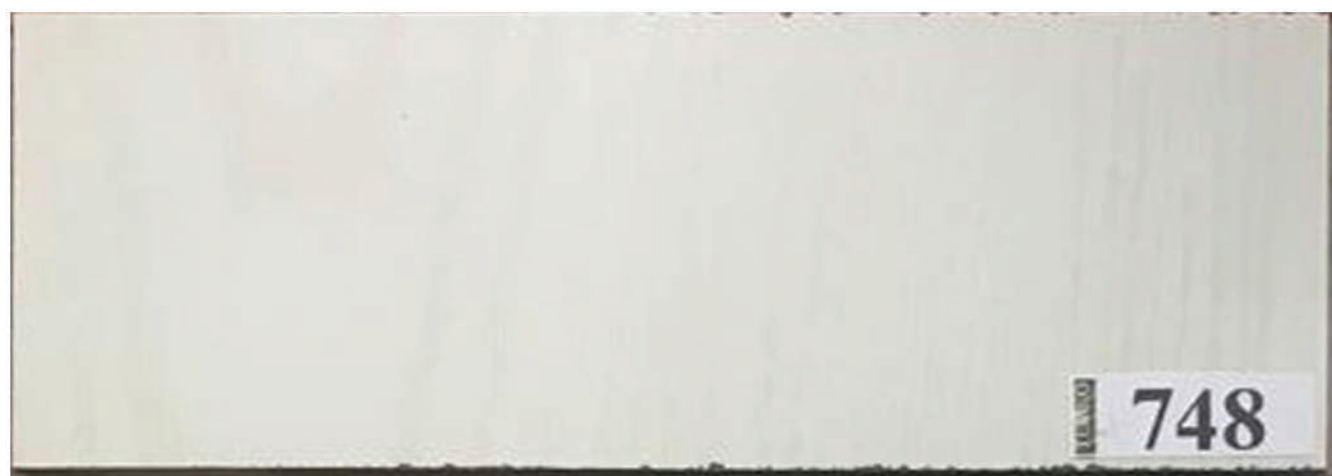

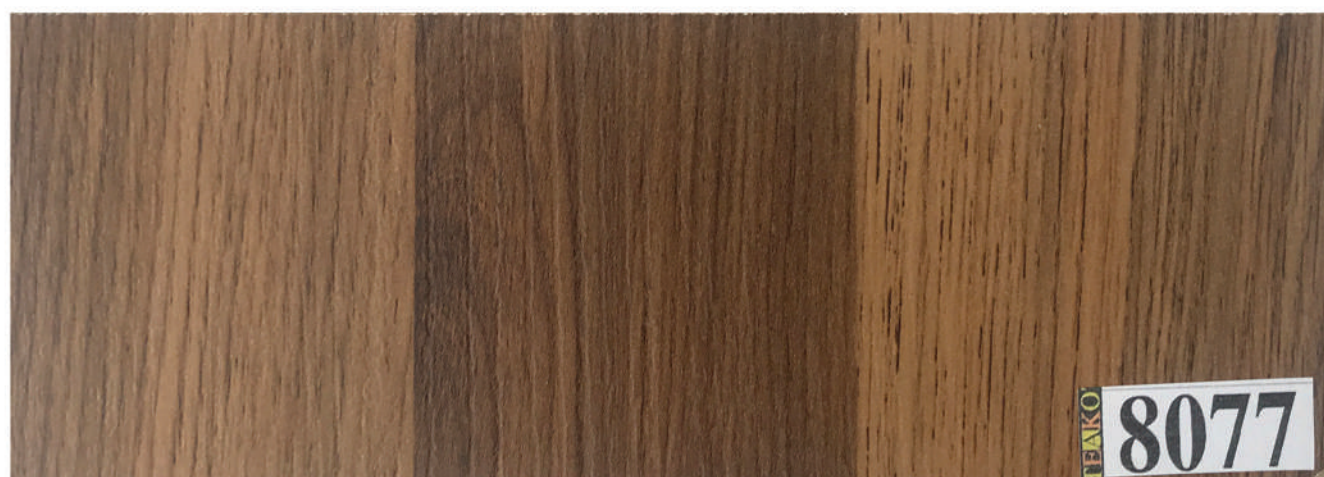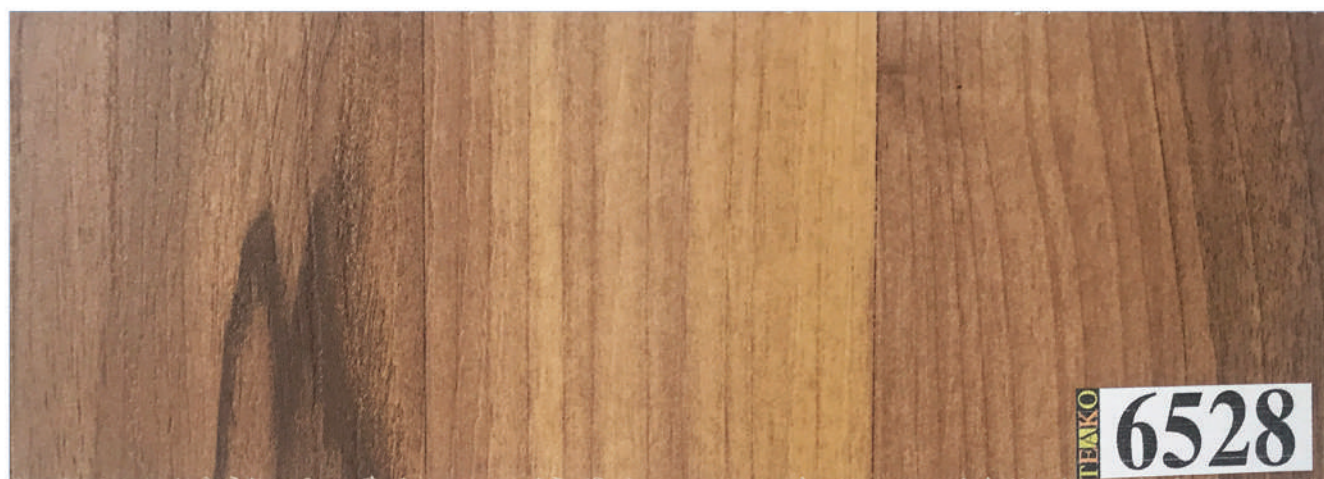

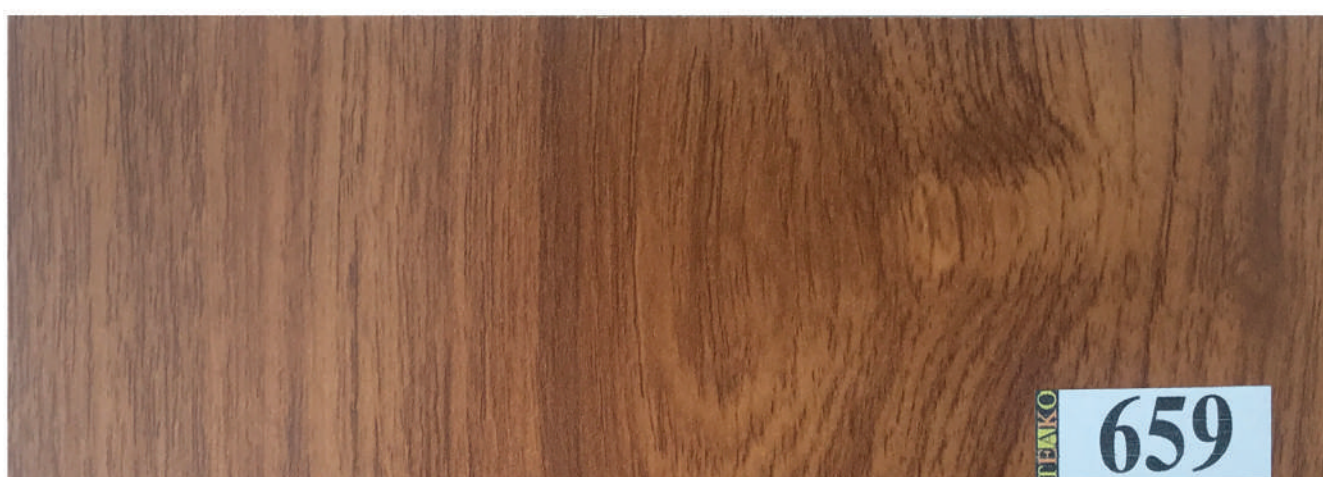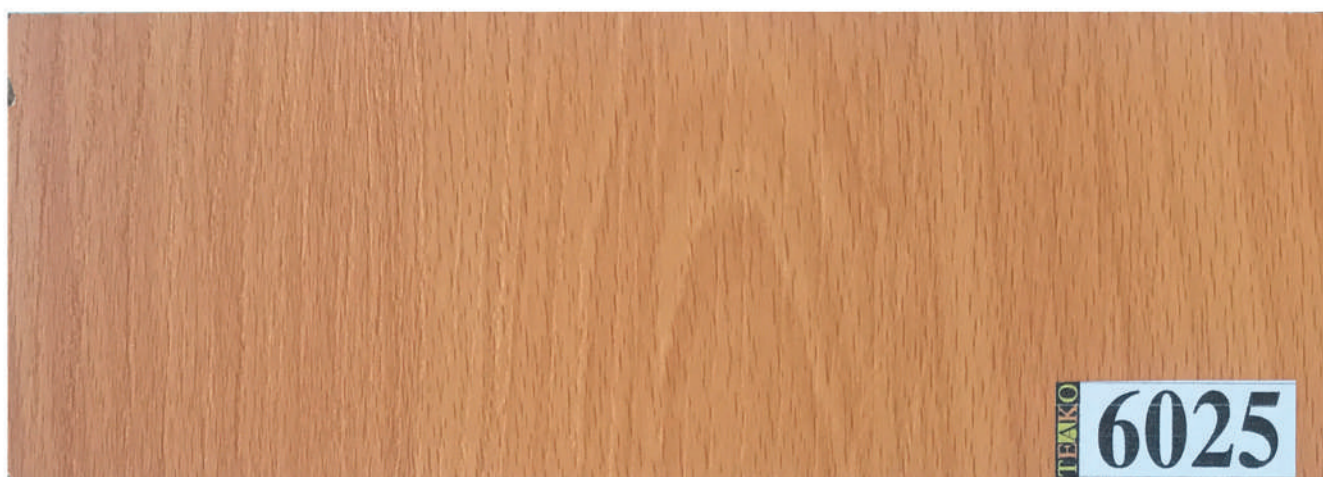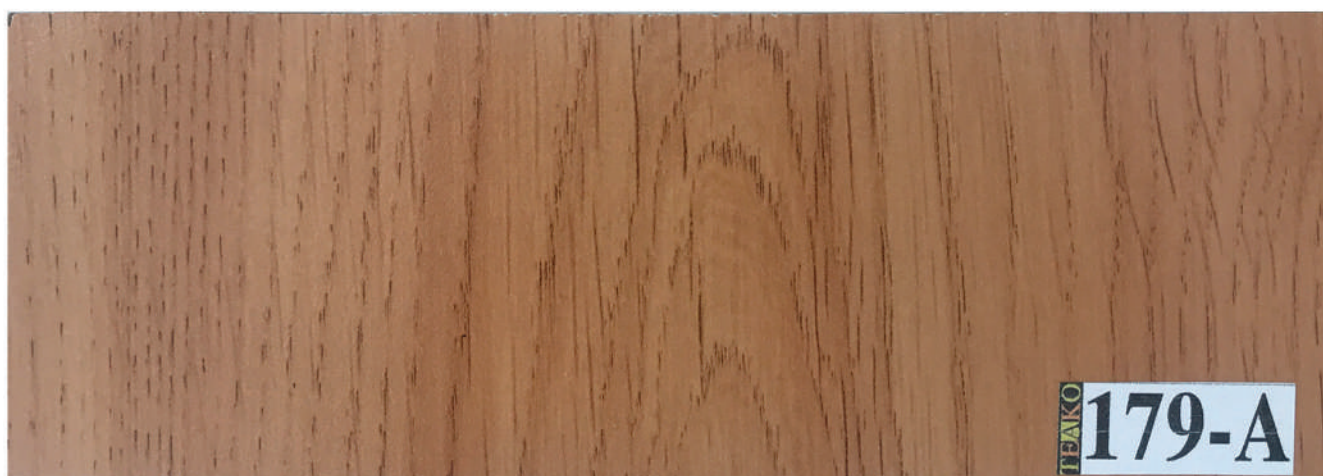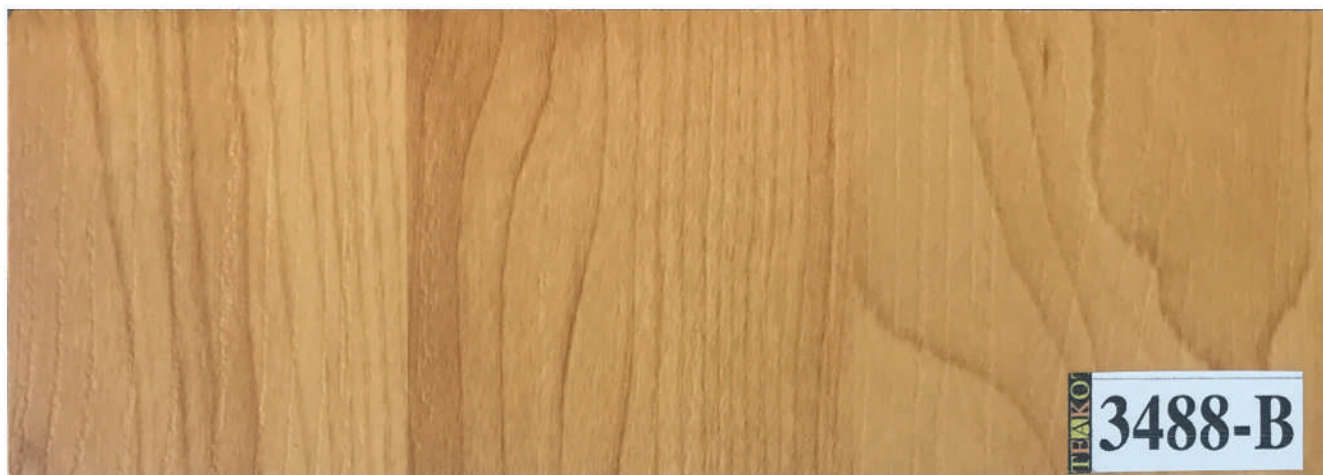




TEAKO is a Leading brand in Laminate wood Floor in The Middle East market. Our warehousing Facilities Located in Beirut and Doha cities are servicing the Local markets and it's neighbouring countries. We offer top of the line laminate floor guaranteeing the quality, market trends and fast delivery.

Consultants trust TEAKO brand



Thickness	8 mm 10 mm 12 mm	AC Rate	AC 3 AC 4 AC 5	Type	Acoustic Non Acouotic	Finishing	Feather Lite Texture Wood Grain Embossed Oak Embossed Beveled Plain
-----------	------------------------	---------	----------------------	------	--------------------------	-----------	--



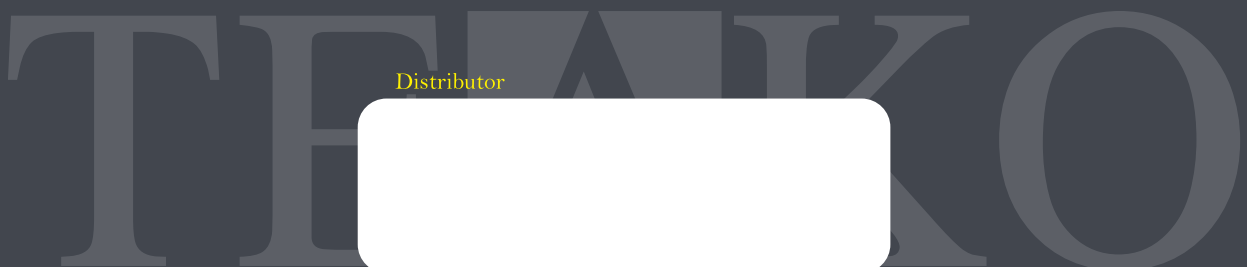


TEAKO

Decoration Laminate Series



Advantages:



Abrasion:

Class	Abrasion Class	Label	pr EN13329	GB/T 18102-2007	Suitable usage	Examples for use
3 1		AC3	≥ 3000	≥ 6000 rounds	General commercial	Hotel Office

Requirement:

Characteristic	Requirement of prEN13329 Ac3	Requirement of GB 18102-2007
Thickness of element, t	Δ taverage ≤ 0.5 mm, on nominal value $t_{max} - t_{min} \leq 0.5$ mm	The same
Length of the surface layer, l	For the nominal values given, no measured value shall exceed: $l \leq 1500$ mm: $\Delta l \leq 0.5$ mm $l > 1500$ mm: $\Delta l \leq 0.3$ mm/m	$\Delta l \leq 1.0$ mm $\Delta l \leq 2.0$ mm
Width of the surface layer, w	Δ Waverage ≤ 0.1 mm, on nominal value $W_{max} - W_{min} \leq 0.2$ mm,	The same
Squared of the element, q	Δ Δ Waverage ≤ 0.1 mm, on nominal value W_{max} W_{min} ≤ 0.2 mm, $q_{max} \leq 0.2$ mm	No requirement
Straightness of the surface layer, s	$q_{max} \leq 0.3$ mm/m	The same
Flatness of the element, f	Maximum single values: $f_{w,concave} \leq 0.15\%$ $f_{w,convex} \leq 0.20\%$ $f_{l,concave} \leq 0.50\%$ $f_{l,convex} \leq 1.00\%$	The same
Openings between elements, o	$O_{average} \leq 0.15$ mm $O_{max} \leq 0.2$ mm	The same
Height difference between elements, h	$h_{average} \leq 0.1$ mm $h_{max} \leq 0.15$ mm	The same
Dimensional variations after changes in relative humidity, δ l, δ w	δ laverage = δ waverage ≤ 0.9 mm	No requirement